


### Technical Features/技术信息

Rated voltage / 额定电压	10 to 30 V
Operating current / 作动电流	2A
Cable/电缆	2 x 0.75 mm <sup>2</sup>
Connector / 连接器	Deutsch DT Series
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C

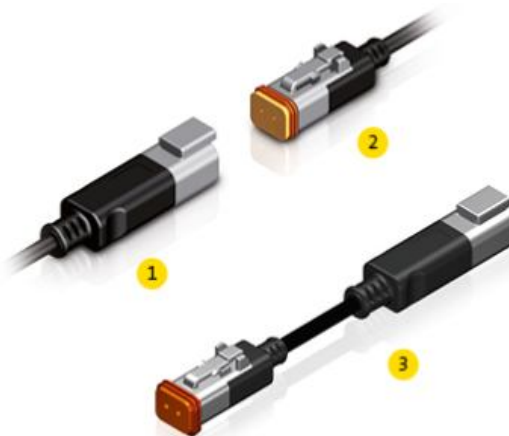

1 – Male  
2 – Female  
3 – Connecting cable

### Order information/订购信息

Type	2 m	5 m	10 m
	Part No.		
1–Male DT04-2P	922046	922047	922048
2–Female DT06-2S	922037	922038	922039
3–Connecting cable	922107	922108	922109

## DEUTSCH DT 2-POLE/LED

### Technical Features/技术信息

Rated voltage / 额定电压	10 to 30 V
Operating current / 作动电流	2A
Cable/电缆	2 x 0.75 mm <sup>2</sup>
Operating indicator / 作动指示灯	LED yellow
Connector / 连接器	Deutsch DT 06-2S
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C



### Order information/订购信息

Type	2 m	5 m	10 m	Optional
	Part No.			
1–Connecting cable	922110	922111	922112	LED + Diode
1–Connecting cable	922113	922114	922115	LED + Varistor
1–Male DT04-2P	922101	922102	922103	LED + Diode
2–Male DT04-2P	922104	922105	922106	LED + Varistor
2–Female DT06-2S	922302	922305	922310	LED + Diode
2–Female DT06-2S	922202	922205	922210	LED + Varistor
2–Female 180° DT06-2S	922159	922160	922161	LED + Diode
2–Female 180° DT06-2S	922162	922163	922164	LED + Varistor
2–Female 180° DT06-2S	922172	922173	922174	

### Technical Features/技术信息

Rated voltage / 额定电压	0 to 230 V
Operating current / 作动电流	13A
Cable/电缆	3 x 1.00 mm <sup>2</sup>
Connector / 连接器	Deutsch DT Series
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C



1 – Male  
2 – Female  
3 – Connecting cable


### Order information/订购信息

Type	2 m	5 m	10 m
	Part No.		
1–Male DT04-3P	922165	922067	922068
2–Female DT06-3S	922166	922063	922064
3–Connecting cable	922144	922145	922146

## DEUTSCH DT 4-POLE/LED

### Technical Features/技术信息

Rated voltage / 额定电压	0 to 230 V
Operating current / 作动电流	13A
Cable/电缆	4 x 1.00 mm <sup>2</sup>
Connector / 连接器	Deutsch DT Series
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C

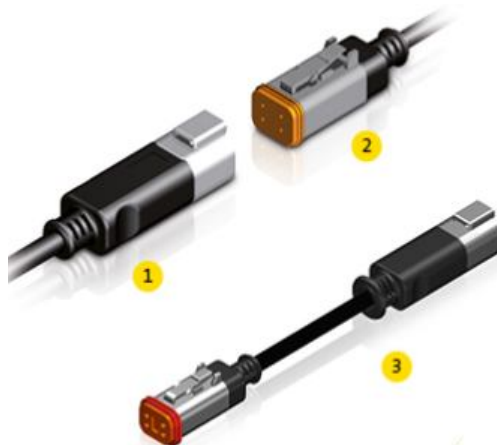

1 – Male  
2 – Female  
3 – Connecting cable


### Order information/订购信息

Type	2 m	5 m	10 m
	Part No.		
1–Male DT04-4P	922049	922050	922051
2–Female DT06-4S	922040	922041	922042
3–Connecting cable	922147	922148	922149

## DEUTSCH DT 6-POLE

### Technical Features/技术信息

Rated voltage / 额定电压	0 to 230 V
Operating current / 作动电流	13A
Cable/电缆	6 x 1.00 mm <sup>2</sup>
Connector / 连接器	Deutsch DT Series
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C

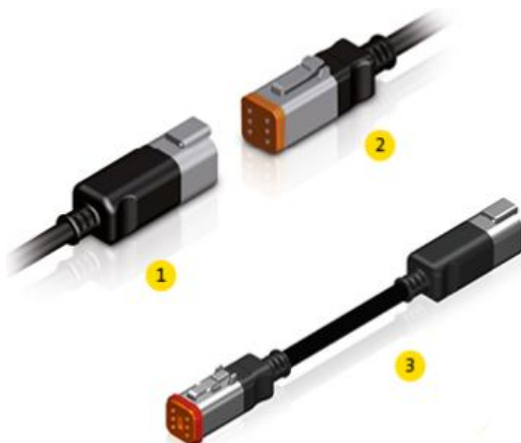

- 1 – Male
- 2 – Female
- 3 – Connecting cable

### Order information/订购信息

Type	2 m	5 m	10 m
	Part No.		
1–Male DT04-6P	922052	922053	922054
2–Female DT06-6S	922043	922044	922045
3–Connection cable	922150	922151	922152

## DEUTSCH DT 8-POLE/LED

### Technical Features/技术信息

Rated voltage / 额定电压	0 to 230 V
Operating current / 作动电流	13A
Cable/电缆	8 x 1.00 mm <sup>2</sup>
Connector / 连接器	Deutsch DT Series
Protection class/ 防护等级	IP 67
Housingmaterial / 外壳材质	PA
Temperature range/温度范围	-20° C to +80° C



- 1 – Male
- 2 – Female
- 3 – Connecting cable

### Order information/订购信息

Type	2 m	5 m	10 m
	Part No.		
1–Male DT04-8P	922121	922122	922123
2–Female DT06-8S	922118	922119	922120
3–Connectoion cable	922153	922154	922155