

# GAS SAFETY VALVE / 瓦斯安全阀



## PH/PF-SERIES (SINGLE STAGE VERSION) /

### 单阶版 PH/PF系列

DN 15 up to DN 20 EN 161

DN 65 up to DN 300 EN 161



\* Position indicator optional /  
指示位置可选择

\* Fast open-fast close /  
快开-快关

#### ■ Technical Features/技术信息


Voltage / 电压	24 VDC or 230 VAC
Range / 范围	200 mBar up to 6 Bar
Connection / 连结	Threaded or flange connection/螺纹或法兰连接
Protection class/ 防护等级	IP65 protection class
Temperature range/温度范围	-30°C up to + 70°C
Contact/接点	Normally closed/normally open ( DN 15, 20, 25 ) /常闭 常开

## PH SERIES (DUAL STAGE VERSION) /

### 双阶版 PH系列

DN 20 dual stage

DN 50 dual stage

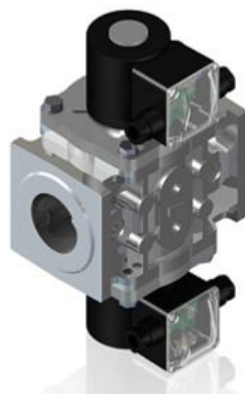

\* Position indicator optional /  
指示位置可选择

\* Fast open-fast close /  
快开-快关

#### ■ Technical Features/技术信息

Voltage / 电压	24 VDC or 230 VAC
Range / 范围	200 mBar up to 3 Bar
Connection / 连结	Threaded or flange connection/螺纹或法兰连接
Protection class/ 防护等级	IP65 protection class
Temperature range/温度范围	-30°C up to + 70°C
Contact/接点	Normally closed/常闭

\* 其它规格和相关信息，请洽我司/Other specification and information, please contact us!

## GAS SAFETY VALVE / 瓦斯安全阀

SLOW OPEN MODE/慢开模式



DN 25 slow open mode



DN 65 slow open mode



\* Slow open – fast close  
慢开-快关


### ■ Technical Features/技术信息

Voltage / 电压	24 VDC or 230 VAC
Range / 范围	500 mBar up to 6 Bar
Connection / 连结	Threaded or flange connection/螺纹或法兰连接
Protection class/ 防护等级	IP65 protection class
Temperature range/温度范围	-30°C up to + 70°C
Contact/接点	Normally closed/常闭

## GAS MODULATING VALVE / 瓦斯调节阀

PM-SERIES / PM系列

Gas Modulating Valve DN 65

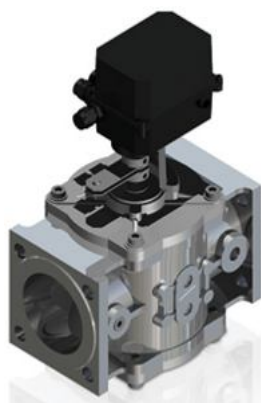

### ■ Feature / 特性

- Switch frequency/开关频率 : 40/hr
- Service interval/保养间隔周期: 200.000 cycles
- Temperature/温度 : -30°C up to 70°C
- Rated pressure max./额定电压最大 : 6 Bar
- Voltage/电压 : 230 VAC
- Power consumption/电源功耗: 20w
- Threaded or flange connection/螺纹或法兰连结

**P      H      A      25□      A      H      1      K**

**Contact/接点**

H – normally closed/常闭  
 F – normally open /常开  
 M – modulating /调制

**Material/材质**

A – Aluminum /铝  
 S – Steel /钢  
 C – Cast Iron/铸铁

**Diameter/尺寸 (DN)**

15, 20, 25, 32, 40,  
 50, 65, 80, 100, 150,  
 200, 250, 300

**NOTE:**

DN 15 to DN 20 Threaded  
 DN 25 to DN 50 Threaded or Flange,  
 Please indicate F for flange (i.e. 25F)  
 DN 65 to DN 300 Flange

如选择法兰连结，尺寸需注明F

**Voltage/电压**

A – 230 VAC  
 D – 24 VDC

**Accessories/配件**

X – None/无  
 K – with gas flow adjustment/  
 含气体流量调节  
 P – position indicator/  
 位置指示  
 E – EX proof/防爆

**Pressure Range/压力范围**

02 – 200 mBar  
 05 – 500 mBar  
 1 – 1 Bar  
 2 – 2 Bar  
 3 – 3 Bar  
 4 – 4 Bar  
 6 – 6 Bar

**Type**

H – single stage/单阶  
 B – dual stage/双阶  
 C – liquid/液体  
 M – with electric power drive/  
 电力驱动  
 T – 1 Stage slow opening mode  
 一阶慢开